PROOF

This is your proof and authorization. Read it carefully, then sign at bottom.

This proof represents copy and configuration as it is to be delivered in its final form, which includes, but is not limited to: text content, copy and photo or image placement and size, folds, die-cuts, bindery, finished size and mailing specifications. Signer is responsible to approve the content and accuracy of all specifications noted below. Crown Printers assumes responsibility for accurately producing the job by matching this signed proof according to the approved specifications noted below. Original copy and or images have been reproduced as accurately as reasonably possible. HOWEVER, please mark in red ink on this proof any errors that need to be corrected or changes that need to be made prior to printing. **CAUTION:** Since files (whether created by Crown Printers or furnished by customer) are created or transmitted electronically, changes could occur when uploaded or downloaded from one software to another. Therefore, even if previously read, it is imperative that the entire proof (not just where alterations may have been made) be reviewed for accuracy prior to printing.

NOTE: PLEASE RETURN BY_____ IN ORDER TO MEET REQUESTED DELIVERY DATE OF_____

Proof No. 4 Job No. 74306 P.O. # 0050052

Date Out 2/23/11 Date In_____

Quantity: 3000 of _____ Version(s) Correct:? ☐ YES ☐ NO

☐ Change quantity to _____. Will accept overs ☐ YES ☐ NO 0 %

Is paper stock description listed below correct? ☐ YES ☐ NO

Cover: TOPKOTE GLOSS COVER

Color WHITE Wt.: 78# ☐ Book ■ Cover ☐ Other _____

Text: WHITEHALL SMOOTH OFFSET

Color WHITE Wt.: 60# ■ Book ☐ Cover ☐ Other _____

Is color of Ink(s) listed below correct? ☐ YES ☐ NO

Cover BLACK / BLACK

Text BLACK + PMS 185 RED / BLACK + PMS 185 RED

Coating or varnish _____

Is finishing, packaging and delivery instructions listed below correct?: ☐ YES ☐ NO ☐ Change

TRIM, FOLD, SCORE, PERF COVER, SADDLESTITCH ON 11" SIDE

FINAL SIZE 8.5" X 11" WITH BACK COVER SHORT ON FACE AND CARTON PACK

MAILING: ☐ Standard ☐ 1st Class ☐ Stamp ☐ Crown Indicia ☐ Customer Indicia #_____ ☐ Nonprofit

Fold/Insert/Seal # of pieces _____ Affix Tab(s) _____ Color:_____

Special Instructions: _____

POSTAGE MUST BE PRE-PAID IN FULL PRIOR TO MAILING

Delivers to: Cannon Safe, Inc Attn: Darrell Madsen

19949 Kendall Drive, San Bernardino, CA 92407

COPYRIGHT INDEMNIFICATION AGREEMENT:

By signing this proof, signer (hereafter referred to as the client's agent) also warrants that the subject matter and/or images to be printed by Crown Printers are not copyrighted by a third party. The client's agent also warrants that they have full rights to any subject matter and/or images supplied by them to be reproduced by Crown Printers. The client's agent also recognizes that because subject matter or images do not have to bear a copyright notice in order to be protected by copyright law, absence of such notice does not necessarily assure a right to reproduce. The client's agent further warrants that no copyright notice has been removed from any material used in preparing the subject matter for reproduction. To support these warrantees, the client's agent agrees to indemnify and hold harmless Crown Printers for all liability, damages and attorney fees that may be incurred in any legal actions connected with copyright infringement involving this job.

PROOF APPROVED AS IS ☐

PROOF APPROVED WITH CORRECTIONS ☐ REVISED PROOF REQUESTED ☐ YES ☐ NO

NOTE: Crown cannot proceed with your order without an authorized signature, all appropriate boxes checked and the return of this proof. Signer also attests that as an agent of said client they agree to the terms and conditions agreement and credit policy published by Crown Printers. Any additions, deletions or alterations requested by you that differ from original copy submitted with this order will result in additional charges which will be reflected in your final billing.

Customer _____

X _____ _____ _____

Authorized Signature Title Date

Crown Printers

250 W. Rialto Ave., San Bernardino, CA 92408 • (909) 888-7531 • Fax (909) 889-1639

Place
First Class
Postage
Here

19949 Kendall Drive
San Bernardino, CA 92407

FOLD HERE

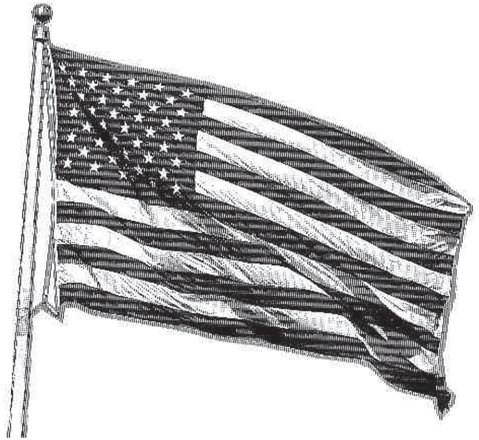

Cannon Safe, Inc.

www.cannonsafe.com

NOTHING **PROTECTS** LIKE A **CANNON**.™

EST. 1965

SAFE
OWNER'S MANUAL

SERIAL NO. _____

Warranty Registration Card

Name: Last First M.I.

_____

Address

_____

City State Zip

_____

About the **Cannon Safe:**

Model Purchased: ❑ Traditional Model #: _____ ❑ Cannon Model #: _____

❑ Other_____

Have you ever bought a Cannon Safe before this purchase? ❑ Yes ❑ No

What features prompted you to purchase a **Cannon Safe?**_____

Besides firearms, what else will you store in your **Cannon Safe?** ❑ Jewelry ❑ Medicine

❑ Documents ❑ Money ❑ Electronics ❑ Other

What prompted you to buy the **Cannon Safe?** ❑ Magazine Ad ❑ Newspaper Ad

❑ TV Ad ❑ Store Salesman ❑ In-Store Display ❑ Magazine Article

❑ Product Quality ❑ Price ❑ Personal Recommendation

❑ Other_____ If Magazine, which one?_____

Where purchased? Dealer Name_____ Date Purchased_____

Type of Store: ❑ Department ❑ Discount Chain ❑ Sporting Goods ❑ Hardware

❑ Firearms Dealer ❑ Locksmith ❑ Catalog ❑ Other _____

Your Sex? ❑ Male ❑ Female

Your Age? ❑ Under 18 ❑ 18–24 ❑ 25–35 ❑ 35–44 ❑ 45–54

❑ 55+

Education ❑ Attended College ❑ Graduated from College

❑ Attended High School ❑ Graduated from High School

Are you a law enforcement officer? ❑ Yes ❑ No

Are/Were you in the Military? ❑ Yes ❑ No Branch

Your approximate household income: ❑ Under–15,000 ❑ 15,000–19,999 ❑ 20,000–29,999

❑ 30,000–39,999 ❑ 40,000–49,999 ❑ Over 50,000

Number of people in your family: Adults_____ Children _____

Where do you plan to use your **Cannon Safe?** ❑ Home ❑ Office ❑ Other

Why did you buy a **Cannon Safe?** ❑ Price ❑ Brand Name ❑ Quality

❑ Features ❑ Other _____

Would you like to be on our mailing list? ❑ Yes ❑ No

Serial # _____ Key Code (Mechanical Lock Only)_____

VERY IMPORTANT (See Key)

Order Form

Cannon Safe Company, Inc.
Attn: Sales
19949 Kendall Dr.
San Bernardino, CA 92407
800.242.1055
909.382.0606 • Fax

Order Date: _____

Billing Address:

Customer: _____

Address: _____

_____

_____

Phone: _____

E-mail: _____

Credit Card Number: _____

Expiration Date: _____

V-Code (3 pin number back of card) _____

Shipping (if different):

Customer: _____

Address: _____

_____

_____

Phone: _____

QTY	Description	Price		Amount
	Shipping Charges (EACH)			
	Wall Safe: $45.00		Shipping and Handling	
	Door Panel Piston Kit $10.00		Tax (CA Residents)	
	Electric Dehumidifier $10.00			
	Pricing Subject to change without notice		Total	

DO NOT LOCK THIS IN YOUR SAFE

IMPORTANT: FILL OUT THE INFORMATION BELOW AND RETAIN FOR YOUR RECORDS
IT WILL BE REQUIRED WHEN CALLING **TECHNICAL SUPPORT** AT:

(800) 242-1055

SERIAL NUMBER

_____

Key Code
(Mechanical Lock Only)

_____

Purchased at
(Dealer Name)

_____

Date of Purchase

_____

Cannon Safe, Inc.

www.cannonsafe.com

18th Edition

INDEX

Serial Number Information..... **Pg. 1**

Index..... **Pg. 2**

President's Letter..... **Pg. 3**

ID My Lock..... **Pg. 4**
S&G Electronic Lock
SecuRam Electronic Lock
LP Electronic Lock

Mechanical Lock..... **Pg. 5**

S&G Electronic Lock..... **Pg. 6**
Open Safe
Programming Instructions
Lock Out (Wrong Try Penalty)
Maintenance

SecuRam Electronic Lock..... **Pg. 7**
Open Safe
Programming Instructions
Lock Out (Wrong Try Penalty)
Maintenance

LP Electronic Lock..... **Pg. 8**
Open Safe
Programming Instructions
Lock Out (Wrong Try Penalty)
Maintenance

Safe Set-Up..... **Pg. 9**
Removing Safe from Pallet
Placement of Safe
Interior Set-Up
Loading Your Safe
Electrical Outlet
Door Adjustment

Certificate of Compliance..... **Pg. 11**

Firearm Records..... **Pg. 12-18**

Warranty..... **Pg. 19**

Safe Accessories..... **Pg. 20**

Registration Card..... **back cover**

Congratulations on your purchase of a Cannon Safe!

We want to thank you for purchasing one of our safes. These units are made in our factories by craftsmen who have years, even decades, of experience building beautiful pieces for your home. We know that it will be a wonderful addition to your home and bring security to your valued possessions.

Cannon Safe strives to build the best quality and functional safe on the market. We believe a home security safe is a very permanent investment, and those who choose to secure personal items, family heirlooms, collectables, money, or firearms should have peace of mind, knowing that these items are in a secure environment.

Our Safes are backed by a lifetime warranty at no additional cost to you. We build each safe to strict standards so if the time comes for it to withstand a burglary attack or fire it will be prepared to do its duty. We are proud to have one of our silent sentinels protecting your valuables. You can be assured that "Nothing Protects Like a Cannon.™"

The Cannon Safe Family

ID My Lock

Use the information below to ID the electronic lock on your safe:

If the top row of numbers on the lock is **1,2,3** with the letter '**Q**' on the number '**1**' you have a **S&G Lock** (pictured below). See Pg 6

If the top row of numbers on the lock is **1,2,3,4** and has a '**SecuRam**' logo on the faceplate you have a **SecuRam Lock** (pictured below). See Pg 7

Icon indicates Backlit Keypad

Standard Keypad

If the top row of numbers on the lock is **1,2,3** with the letter '**A**' on the number '**1**' you have a **LP Lock** (pictured below). See Pg 8

MECHANICAL LOCK

(dial that spins left and right)

1. How to open/operate a mechanical lock

Important: Turn dial slowly and evenly, never spin or flip the dial rapidly. Do not turn back to regain alignment if you rotate past number. If an error is made, re-dial entire combination. Do not count turns. Count how many times each number is aligned with the opening index (at the 12 o'clock position). Always view dial and ring straight on, not at an angle. It is the owners' responsibility to maintain the code; Cannon will try to maintain records for up to 6 months.

Step 1: Turn dial left, aligning first number with opening index the fourth time it comes to the index

Step 2: Turn dial right, aligning second number with the opening index the third time it comes to the index

Step 3: Turn dial left, aligning third number with the opening index the second time it comes to the index

Step 4: Turn dial right until dial comes to a complete stop

Step 5: Turn handle to the left or counter-clockwise to open safe
Step 6: To relock and secure the combination lock, turn the dial to the left at least four revolutions

2. How to Use the Key Locking Dial

The dial has a key feature. This will allow the dial to be locked either in the open mode or locked mode.

Locking the dial at 90 after combination has opened the safe will prevent anyone from shutting the door and locking it. Once you close the door and turn the combination, you can then lock the dial in the "0" position to prevent anyone from tampering with the lock.

Never use the key as the sole means of locking the safe.
It is not meant as the primary locking feature.

3. Maintenance

Important: All maintenance work should be performed by a qualified locksmith in your area. Cannon assumes no responsibility for the cost of maintenance or the work performed.

Per the manufacturer mechanical locks should be lubricated and cleaned annually by a qualified locksmith.

Never attempt to lubricate or clean the dial or lock on your own.

S&G Electronic Lock

(#1 key on the keypad has the letter 'Q')

1. Opening the Safe

Important: The factory preset code is 1,2,3,4,5,6,# and should be changed before using the safe. It is the owners' responsibility to maintain the code; Cannon will try to maintain records for up to 6 months. Multiple electronic locks are used, each with different operating instructions.

See the '**ID My Lock**' section before beginning (Pg 4).

Step 1: Turn the handle slightly clockwise until handle stops. **Do not force!**
Step 2: Enter the six (6) digit code slowly, then #.
Step 3: Turn handle counter-clockwise to unlock safe.

If there's a long brap (beep) after entering the code the lock doesn't recognize the code. Slow down and start over.

2. Programming Instructions

Important: When changing the combination, door must be in the ***open*** and ***locked*** position. On some safe models there is a detent release on the bottom of the door that must be pushed up to put door into locked position. You must know the current six (6) digit code to program and have 20 seconds to complete steps 1-4.

Step 1: Press 7 4 * (existing code) # - There will be 5 beeps.
Step 2: Press 1 *
Step 3: Enter new six (6) digit code # - There will be 3 beeps.
Step 4: Re-enter new six (6) digit code # - There will be 3 beeps.

If the lock signals a long brap (beep) the old code is still valid.

3. Lock Out (Wrong Try Penalty)

After four (4) wrong entries the lock will go into lock out for 15 minutes. Lock can also go into lock out during re-programming if it interprets an incorrect programming sequence.

Do not press any buttons or unplug the battery during the lockout period.
It will restart the 15 minute waiting period.

4. Maintenance

Important: All maintenance work should be performed by a qualified locksmith in your area. Cannon assumes no responsibility for the cost of maintenance or the work performed.

Low Battery Warning: The lock will beep twenty (20) consecutive times after the last number of the combination is entered. **Only use Duracell Alkaline batteries with a 'Best if Used by Date' 5 years in the future.**

Changing the Battery: On bottom of the face plate remove the tape with the red tab and locate the trap door; push up slightly and slide forward. Battery tray will drop straight down. Attach new battery, slide into opening, and replace trap door by pushing up slightly and sliding back.

SecuRam Lock

(top row of numbers are 1,2,3,4 and a 'SecuRam' logo on the faceplate)

1. Opening the Safe

Important: The factory preset code is 1,2,3,4,5,6 and should be changed before using the safe. It is the owners' responsibility to maintain the code; Cannon will try to maintain records for up to 6 months. Multiple electronic locks are used, each with different operating instructions.

See the '**ID My Lock**' section before beginning (Pg 4).

Step 1: Turn the handle slightly clockwise until handle stops. **Do not force!**
Step 2: Enter the six (6) digit code slowly.
Step 3: Turn handle counter-clockwise to unlock safe.

If there are three (3) beeps after entering the code the lock doesn't recognize the code. Slow down and start over.

2. Programming Instructions

Important: When changing the combination, door must be in the ***open*** and ***locked*** position. On some safe models there is a detent release on the bottom of the door that must be pushed up to put door into locked position. You must know the current six (6) digit code to program and have 20 seconds to complete steps 1-4.

Step 1: Enter '0' six (6) times
Step 2: Enter existing six (6) digit code
Step 3: Enter new six (6) digit code
Step 4: Re-enter new six (6) digit code

If lock signals three (3) times old code is still valid.

3. Lock Out (Wrong Try Penalty)

After four (4) wrong entries the lock will go into lock out for 5 minutes. Lock can also go into lock out during re-programming if it interprets an incorrect programming sequence.

Do not press any buttons or unplug the battery during the lockout period.
It will restart the 5 minute waiting period.

4. Maintenance

Important: All maintenance work should be performed by a qualified locksmith in your area. Cannon assumes no responsibility for the cost of maintenance or the work performed.

Low Battery Warning: The lock will repeatedly beep during unlocking indicating that the battery is low and needs to be replaced. **Only use Duracell Alkaline batteries with a 'Best if Used by Date' 5 years in the future.**

Changing the Battery: To replace battery slide the keypad up and lift off. Locate the battery on the back side of keypad and replace.

LP Lock

(top row of numbers are 1,2,3 with the letter 'A' on the number '1')

1. Opening the Safe

Important: The factory preset code is 1,2,3,4,5,6 and should be changed before using the safe. It is the owners' responsibility to maintain the code; Cannon will try to maintain records for up to 6 months. Multiple electronic locks are used, each with different operating instructions.

See the '**ID My Lock**' section before beginning (Pg 4).

Step 1: Turn the handle slightly clockwise until handle stops. **Do not force!**
Step 2: Enter the six (6) digit code slowly.
Step 3: Turn handle counter-clockwise immediately after the two (2) beeps to unlock safe.

If there is one (1) long beep after entering the code the lock doesn't recognize the code. Slow down and start over.

2. Programming Instructions

Important: When changing the combination, door must be in the ***open*** and ***locked*** position. On some safe models there is a detent release on the bottom of the door that must be pushed up to put door into locked position. You must know the current six (6) digit code to program and have 20 seconds to complete steps 1-4.

Step 1: Press and hold '0' until double beep. The LED remains on during the following actions
Step 2: Enter existing six (6) digit code - You will hear a double beep
Step 3: Enter new six (6) digit code - You will hear a double beep
Step 4: Re-enter new six (6) digit code - You will hear a double beep

If lock gives a long beep the old code is still valid.

3. Lock Out (Wrong Try Penalty)

After four (4) wrong entries the lock will go into lock out for 5 minutes. Lock can also go into lock out during re-programming if it interprets an incorrect programming sequence.

Do not press any buttons or unplug the battery during the lockout period.
It will restart the 5 minute waiting period.

4. Maintenance

Important: All maintenance work should be performed by a qualified locksmith in your area. Cannon assumes no responsibility for the cost of maintenance or the work performed.

Low Battery Warning: The lock will repeatedly beep during unlocking indicating that the battery is low and needs to be replaced. **Only use Duracell Alkaline batteries with a 'Best if Used by Date' 5 years in the future.**

Changing the Battery: To replace battery locate the sliding door on the bottom of the keypad. Slide door over and battery will drop out.

Safe Set-Up

1. Removing Safe from Pallet

Cannon Safe recommends contacting professional movers to install your safe.
By choosing to install the safe on your own you agree to hold Cannon Safe blameless of any damage, injury, or death caused by your negligence.
Proceed with caution.

Use Caution. Safe is top heavy. While having someone(s) securely holding the safe:

- Open door, remove the 2 lag screws from the floor area (all four corners).
- Close door. If equipped with a mechanical lock turn dial back to zero and lock with key.
- With at least two (2) people, carefully slide the safe from pallet.

2. Placement of the Safe

Before placing your safe, verify the load bearing weight of the floor or stairs the safe will be moved over (tile, wood, and other types of floors could be damaged by the weight of the safe). To help determine if the safe will make it through doorways, stairs, or corners use the empty safe box to see if it will fit all the way to the final location.

When choosing a location consider the following:

- Install the safe near a load-bearing wall as a precaution to support the weight.
- To protect the exterior finish consider installing the safe inside your home where there's climate control.
- Where the safe is placed will have a big impact on how it will perform during a fire. Consider lower levels (1st floor or basement) where temperatures tend to be cooler and try to stay away from potential hot spots (areas where flammable materials are stored).

3. Interior Set-Up

Interior is subject to change and may differ depending on size and model.

- Install top shelf, or shelves at desired height using the provided shelf clips.
- The gun rack is already installed.
- Install side shelves.
- The cover plate fits directly over half the gun rack. This allows you to use the rack as a shelf.

Shelf clips can be adjusted as needed. Side shelves may be installed on the right or left. For an all-rifle interior remove the side shelves and cover plate.

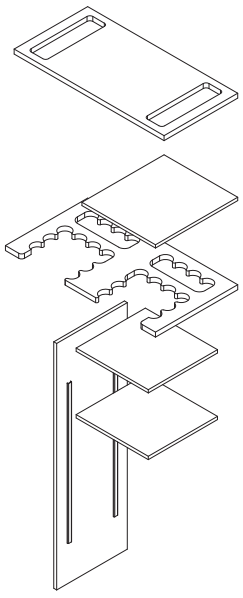

4. Loading Your Safe

Do not put anything in your safe that will put pressure against the door when it's closed.
Overloading shelves (50 + lbs.) can cause them to sag or break. Maximum weights vary by model.
Store heavy contents away from the middle of the shelf and
try to distribute weight evenly across shelf.

- When putting guns into your safe, make sure they rest securely into the cutouts to prevent accidental tipping when the door is closed.
- A dehumidifier or desiccant is recommended in humid environment to protect against rust and mildew. Dehumidifiers and other moisture reducing products are available from your dealer or www.cannonsafe.com.
- If using the optional Door Panel Pistol kit the holsters should be securely attached and not hitting against the shelves or other objects in the safe. Door Panel Pistol kit is available through your dealer or www.cannonsafe.com.

5. Electrical Outlet (Select Models)

Electric outlets are pre-installed on all models. Some assembly required:

- Locate the power cord inside the safe.
- Insert the plug into the electrical access hole in the back of the safe.

Electrical outlet only powers items plugged into the outlet inside the safe.
Electronic locks are only powered by the 9volt battery outside the safe.

6. Door Adjustment

If your safe door has excessive in and out play that exceeds 1/8 inch, the door can be adjusted by using a Phillips screwdriver.

Use caution when adjusting.
Over adjustment can cause a lock out.

Example to the right.

With the door open locate the U-Shaped cutout on the rear of the left door jam that's in alignment with the second locking bolt from the top. Using a Philips screwdriver insert the end into the hole in the middle of the U-Shaped cutout. Gently pull away from the safe in small increments to tighten.

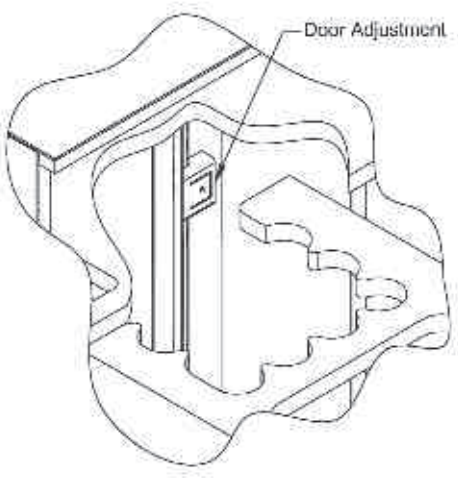

Certificate of Compliance

The following Cannon Safe, Inc. security products exceed California Department of Justice "Gun Safe Standards" as per Title11, Division 1, Chapter 12.6, § 977.50;

- Commander Series, all models.
- Cannon Series, all models.
- Armory Series, all models.
- Patriots Series, all models.
- Home & Office Series, all models.
- Scout Series, all models.

DO NOT DISCARD THIS CERTIFICATE.
ATTACH TO YOUR RECEIPT OF PURCHASE.

ALL CANNON SAFES ARE
UL BURGLARY RATED
TO THE RESIDENTIAL SECURITY
CONTAINER STANDARD

Firearm Records

Firearm Record:

Pistol ☐ Rifle ☐ Shotgun ☐ Serial Number _____

Make _____ Model _____ Caliber/Gauge _____

Grips/Stock _____ Barrel Length _____ Overall Length _____

Finish _____ Scopes and Sights _____

Other Features _____

_____

Repairs/Mods/Accessories _____

_____

Record of Purchase:

Purchase Date _____ Cost _____ Condition _____

Estimated Current Value _____

Record of Sale:

Date Sold _____ Price _____ Sold To _____

Registration Information _____

_____

DROS # _____

Firearm Record:

Pistol ☐ Rifle ☐ Shotgun ☐ Serial Number _____

Make _____ Model _____ Caliber/Gauge _____

Grips/Stock _____ Barrel Length _____ Overall Length _____

Finish _____ Scopes and Sights _____

Other Features _____

_____

Repairs/Mods/Accessories _____

_____

Record of Purchase:

Purchase Date _____ Cost _____ Condition _____

Estimated Current Value _____

Record of Sale:

Date Sold _____ Price _____ Sold To _____

Registration Information _____

_____

DROS # _____

Firearm Records

Firearm Record:

Pistol ☐ Rifle ☐ Shotgun ☐ Serial Number _____

Make _____ Model _____ Caliber/Gauge _____

Grips/Stock _____ Barrel Length _____ Overall Length _____

Finish _____ Scopes and Sights _____

Other Features _____

_____

Repairs/Mods/Accessories _____

_____

Record of Purchase:

Purchase Date _____ Cost _____ Condition _____

Estimated Current Value _____

Record of Sale:

Date Sold _____ Price _____ Sold To _____

Registration Information _____

_____

DROS # _____

Firearm Record:

Pistol ☐ Rifle ☐ Shotgun ☐ Serial Number _____

Make _____ Model _____ Caliber/Gauge _____

Grips/Stock _____ Barrel Length _____ Overall Length _____

Finish _____ Scopes and Sights _____

Other Features _____

_____

Repairs/Mods/Accessories _____

_____

Record of Purchase:

Purchase Date _____ Cost _____ Condition _____

Estimated Current Value _____

Record of Sale:

Date Sold _____ Price _____ Sold To _____

Registration Information _____

_____

DROS # _____

Firearm Records

Firearm Record:

Pistol ☐ Rifle ☐ Shotgun ☐ Serial Number _____

Make _____ Model _____ Caliber/Gauge _____

Grips/Stock _____ Barrel Length _____ Overall Length _____

Finish _____ Scopes and Sights _____

Other Features _____

_____

Repairs/Mods/Accessories _____

_____

Record of Purchase:

Purchase Date _____ Cost _____ Condition _____

Estimated Current Value _____

Record of Sale:

Date Sold _____ Price _____ Sold To _____

Registration Information _____

_____

DROS # _____

Firearm Record:

Pistol ☐ Rifle ☐ Shotgun ☐ Serial Number _____

Make _____ Model _____ Caliber/Gauge _____

Grips/Stock _____ Barrel Length _____ Overall Length _____

Finish _____ Scopes and Sights _____

Other Features _____

_____

Repairs/Mods/Accessories _____

_____

Record of Purchase:

Purchase Date _____ Cost _____ Condition _____

Estimated Current Value _____

Record of Sale:

Date Sold _____ Price _____ Sold To _____

Registration Information _____

_____

DROS # _____

Firearm Records

Firearm Record:

Pistol ☐ Rifle ☐ Shotgun ☐ Serial Number _____

Make _____ Model _____ Caliber/Gauge _____

Grips/Stock _____ Barrel Length _____ Overall Length _____

Finish _____ Scopes and Sights _____

Other Features _____

_____

Repairs/Mods/Accessories _____

_____

Record of Purchase:

Purchase Date _____ Cost _____ Condition _____

Estimated Current Value _____

Record of Sale:

Date Sold _____ Price _____ Sold To _____

Registration Information _____

_____

DROS # _____

Firearm Record:

Pistol ☐ Rifle ☐ Shotgun ☐ Serial Number _____

Make _____ Model _____ Caliber/Gauge _____

Grips/Stock _____ Barrel Length _____ Overall Length _____

Finish _____ Scopes and Sights _____

Other Features _____

_____

Repairs/Mods/Accessories _____

_____

Record of Purchase:

Purchase Date _____ Cost _____ Condition _____

Estimated Current Value _____

Record of Sale:

Date Sold _____ Price _____ Sold To _____

Registration Information _____

_____

DROS # _____

Firearm Records

Firearm Record:

Pistol ☐ Rifle ☐ Shotgun ☐ Serial Number _____

Make _____ Model _____ Caliber/Gauge _____

Grips/Stock _____ Barrel Length _____ Overall Length _____

Finish _____ Scopes and Sights _____

Other Features _____

_____

Repairs/Mods/Accessories _____

_____

Record of Purchase:

Purchase Date _____ Cost _____ Condition _____

Estimated Current Value _____

Record of Sale:

Date Sold _____ Price _____ Sold To _____

Registration Information _____

_____

DROS # _____

Firearm Record:

Pistol ☐ Rifle ☐ Shotgun ☐ Serial Number _____

Make _____ Model _____ Caliber/Gauge _____

Grips/Stock _____ Barrel Length _____ Overall Length _____

Finish _____ Scopes and Sights _____

Other Features _____

_____

Repairs/Mods/Accessories _____

_____

Record of Purchase:

Purchase Date _____ Cost _____ Condition _____

Estimated Current Value _____

Record of Sale:

Date Sold _____ Price _____ Sold To _____

Registration Information _____

_____

DROS # _____

Firearm Records

Firearm Record:

Pistol ☐ Rifle ☐ Shotgun ☐ Serial Number _____

Make _____ Model _____ Caliber/Gauge _____

Grips/Stock _____ Barrel Length _____ Overall Length _____

Finish _____ Scopes and Sights _____

Other Features _____

_____

Repairs/Mods/Accessories _____

_____

Record of Purchase:

Purchase Date _____ Cost _____ Condition _____

Estimated Current Value _____

Record of Sale:

Date Sold _____ Price _____ Sold To _____

Registration Information _____

_____

DROS # _____

Firearm Record:

Pistol ☐ Rifle ☐ Shotgun ☐ Serial Number _____

Make _____ Model _____ Caliber/Gauge _____

Grips/Stock _____ Barrel Length _____ Overall Length _____

Finish _____ Scopes and Sights _____

Other Features _____

_____

Repairs/Mods/Accessories _____

_____

Record of Purchase:

Purchase Date _____ Cost _____ Condition _____

Estimated Current Value _____

Record of Sale:

Date Sold _____ Price _____ Sold To _____

Registration Information _____

_____

DROS # _____

Firearm Records

Firearm Record:

Pistol ☐ Rifle ☐ Shotgun ☐ Serial Number _____

Make _____ Model _____ Caliber/Gauge _____

Grips/Stock _____ Barrel Length _____ Overall Length _____

Finish _____ Scopes and Sights _____

Other Features _____

_____

Repairs/Mods/Accessories _____

_____

Record of Purchase:

Purchase Date _____ Cost _____ Condition _____

Estimated Current Value _____

Record of Sale:

Date Sold _____ Price _____ Sold To _____

Registration Information _____

_____

DROS # _____

Firearm Record:

Pistol ☐ Rifle ☐ Shotgun ☐ Serial Number _____

Make _____ Model _____ Caliber/Gauge _____

Grips/Stock _____ Barrel Length _____ Overall Length _____

Finish _____ Scopes and Sights _____

Other Features _____

_____

Repairs/Mods/Accessories _____

_____

Record of Purchase:

Purchase Date _____ Cost _____ Condition _____

Estimated Current Value _____

Record of Sale:

Date Sold _____ Price _____ Sold To _____

Registration Information _____

_____

DROS # _____

CANNON LIFETIME WARRANTY

This Cannon Safe carries a lifetime warranty in Residential Use. It is warranted against defects in workmanship and materials, also against damage by attempted break-in or actual break-in, natural flood and fire. Commercial or Industrial applications carry a 1 year warranty against defects in workmanship and materials.

In order to obtain service under this Warranty, Purchaser must provide Cannon Safe, Inc. with following items 1) proof of purchase, 2) police or fire department report, 3) photographs of damaged safe, and 4) written testimonial. Cannon Safe, Inc. may, at its discretion, repair or replace any defective or damaged part or replace the defective or damaged safe. Whenever possible the safe will be repaired locally. If Cannon Safe, Inc. is replacing a safe, we will require the old safe to be returned to the factory. This being the case Cannon Safe, Inc. will at its expense have the safe opened and will pay for the freight to return to the factory. The purchaser must have the safe packaged and palletized and available for a curb side pickup at their expense. This Warranty does not cover labor costs for removal or installation of the safe and contents. Personal property in the safe is not covered.

The obligation Cannon Safe, Inc. has under this Warranty is contingent upon proper installation and use of the safe, and shall not apply to parts or safes which have been misused, neglected, or put in unusual or extreme environments. Modifying or tampering with the safe, which might affect the product's use, voids this Warranty.

Without limitation, this Warranty specifically excludes any liability for defects or damage caused by, or aggravated by, human error or the use of unauthorized parts. Upon delivery, Purchaser must promptly notify Cannon Safe, Inc. of any defect. Purchaser's remedies are limited solely to repair or replacing parts and are at the discretion of Cannon Safe, Inc.

Electronic and mechanical locks carry a one year warranty for labor; a lifetime warranty for parts. This warranty does not cover lost or forgotten combinations, improper opening procedure, weak or dead batteries. Paint is warranted for one year based on proper care and environment. This Warranty only applies to safes located in the continental United States, for residential use, and purchased at an authorized Cannon Safe Dealer. **(Commercial or business use carries only a 1 year warranty.)**

This Warranty is given in place of all other warranties and assurances, whether expressed or implied, including but not limited to matters of quality, fitness for purpose, or merchantability and Cannon Safe, Inc. accepts no liability, under any circumstances whatsoever, for any incidental or consequential damage or loss suffered by anyone, or to any property, as a result of using or being unable to use the safe.

Safe Accessories

Keypad Wall Vault - $262.00

- Electronic lock
- Two Override Keys
- Upholstered Interior Walls
- Drop Down Door Opens Instantly
- Low Profile Design
- Steel Construction
- Easy Installation
- False bottom secret compartment
- Vertical drop door

CA DOJ Approved

Door Panel Pistol Kit - $64.00

- This custom item is designed for storage of unloaded weapons only
- Accommodates multiple handguns with six configurable holsters
- Velcro design for easy placement
- Cannon Easy Hook – Universal mount on most safe door panels
- No drilling required – installs in minutes without the use of any specialized tools.

Security Safe Light - $20.00

- Push-Button Operation
- Red LED Light Source
- Two-Minute Lighting Cycle
- Simple Magnetic Attachment
- 3V Lithium Battery (included)
- 750+ Lighting Cycles per Battery

Silica Gel Dehumidifier - $24.00

- Dries approx. 57 cubic feet
- Non-toxic, safe to use with sensitive materials
- Blue-to-Pink Indicator Cap
- Reactivates Easily in Oven

Electric Dehumidifier - $64.00

Climate conditions inside a safe can vary greatly from external surroundings. Trapped air within the security enclosure will tend to drop in temperature. With no escape or distribution of this cold air, items within the safe can become vulnerable to damage by liquid condensation caused by increased humidity factor.

GunSaver heats to a surface temperature of less than 130 degrees Fahrenheit. Because of its unique design, it circulates warm dry air throughout the gun safe on a continuous basis. This means each and every internal surface is continuously bathed in warm DRY air.

This is the key to the operation of the GunSaver. It maintains all parts 2 to 3 degrees warmer than the room, thus practically eliminating the possibility of condensation and the resultant rust and corrosion of metal parts, not to mention the mold and mildew associated with dampness and humidity. The low, even temperature will keep your guns nicely preserved.

Orders can be placed by visiting www.cannonsafe.com or by mailing/faxing the attached order form. Product or pricing subject to change without notice.